



Product Name	Dimensions	Number	Statement
HFL 120-60	Rmin:120 mm	1	Camera Field of View
	Rmax:250 mm	2	Lighting Zone
	Heigh: 45,37mm	3	Product Cable

1.FEATURES

- **TECHNICAL SPECIFICATIONS**
 - * Lighting Color: Green, 6000K
 - * Illumination Angle: 120° - 60°
 - * Illumination Tilt: 60°
 - * Number of LEDs: 700
 - * Input Voltage: 24 V
 - * Input Current (continuous): 0.7 A
 - * Stable Voltage Operation: Yes
 - * Diffuser Option: Yes

3.APPLICATIONS





- Engine Part Inspections
- Packaging Inspections
- Medical Bottle Inspections
- Food Package Inspections
- Surface Inspections
- Microscopic Camera Applications
- Particle Imaging in Liquid
- Particle Size Measurement
- Particle Counting
- Machine Vision
- Cell Identification
- Flame Length Measurement
- Edge Detection
- Material Strain Measurement (elongation / shortening / degradation)
- Motion Detection
- Product Counting
- Color Concentration Information
- Coordinate Information

2.DESCRPTIONS

- Low Angle lighting is a specialized illumination technique used in image processing projects. In this technique, the light source is directed at a low angle towards the object, emphasizing shadows and surface details, providing specific advantages.

- Particle Identification
- Cell Imaging
- Machine Monitoring
- Image Processing
- Industrial Led Lighting
- Conveyor Line Lighting
- Robot Vision Applications
- Industry 4.0 Applications
- Machine Lighting
- Bar Light
- Dark Field Light
- Panel Lighting
- Dark Effect Lighting
- Dome Light
- Ring Light
- Panel Light
- Back Light
- Dome Type
- Lighting

4.LIGHT CHARACTERISTICS

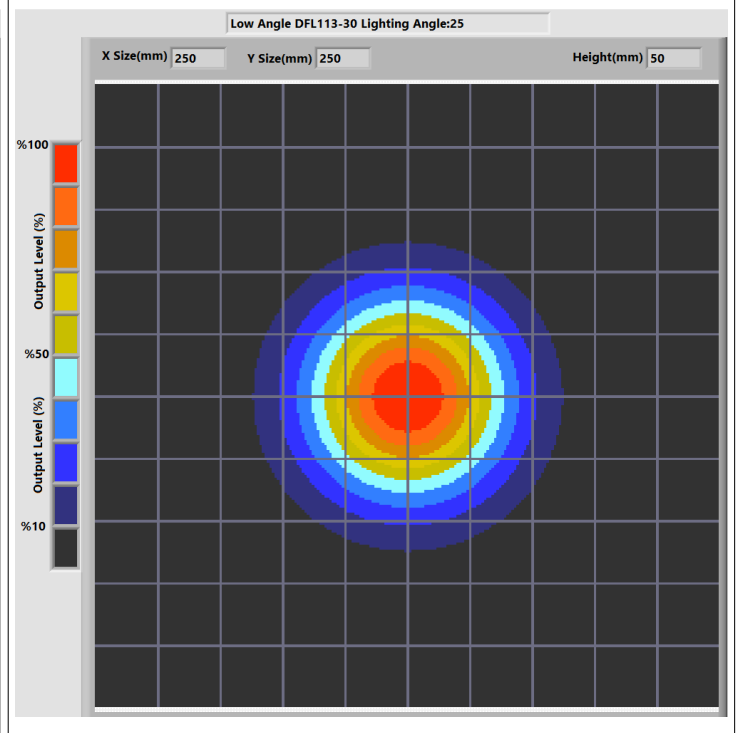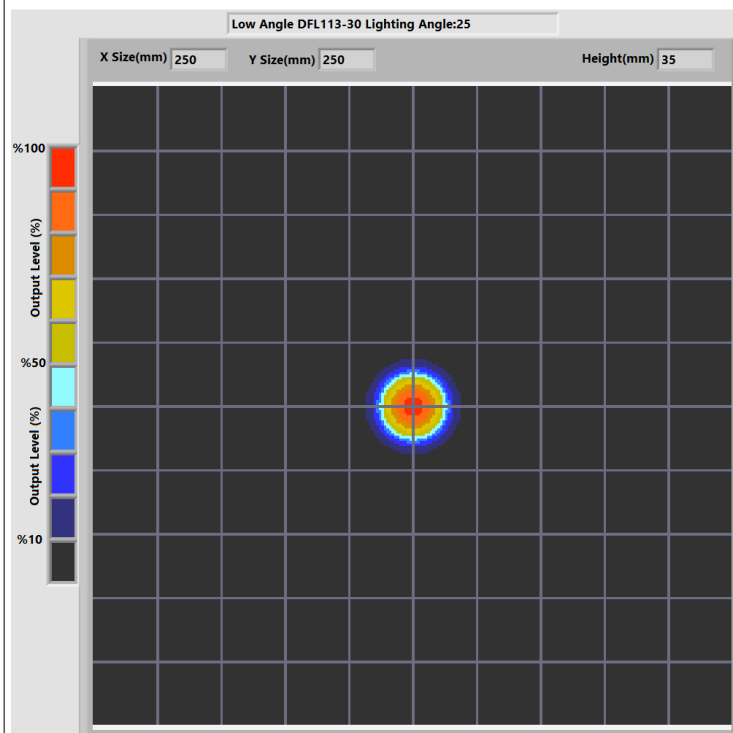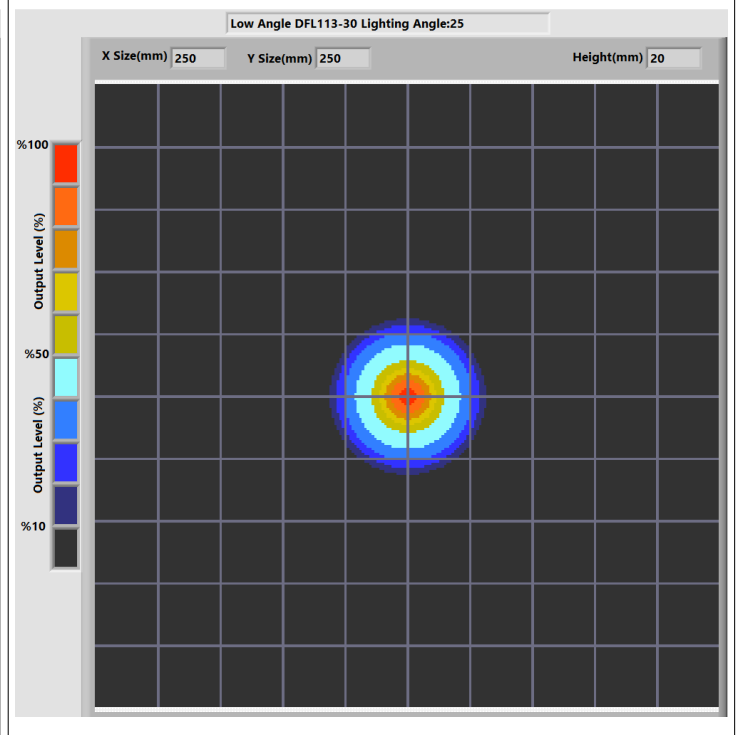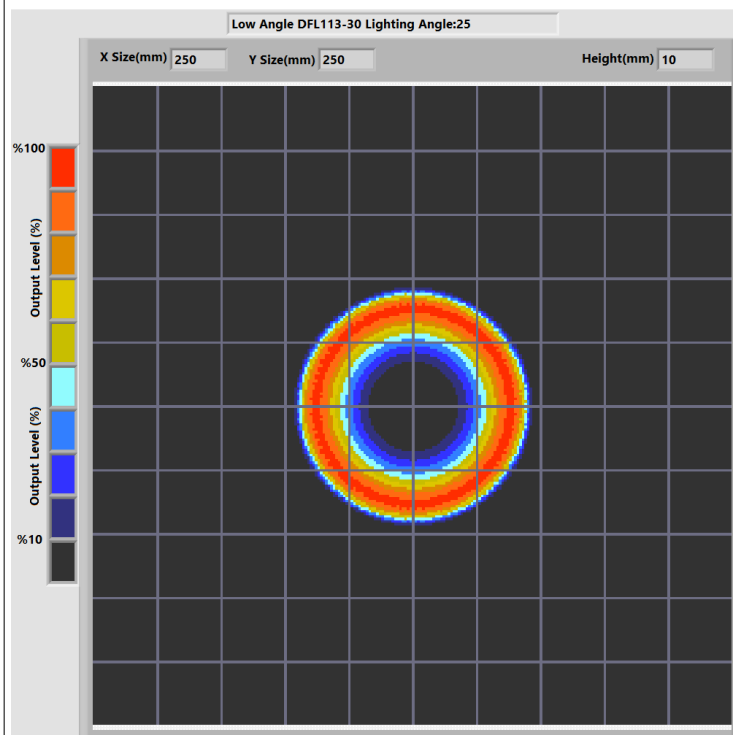

Lens:12mm

Money




Camera h:130mm

Light h:40mm

Lens:12mm

Nut



Camera h:130mm

Light h:40mm

Lens:12mm

Cap




Camera h:130mm

Light h:40mm

Lens:12mm

Bolt



Camera h:130mm

Light h:40mm

Lens:12mm

Can




Camera h:230mm

Light h:40mm

Lens:12mm

Cap

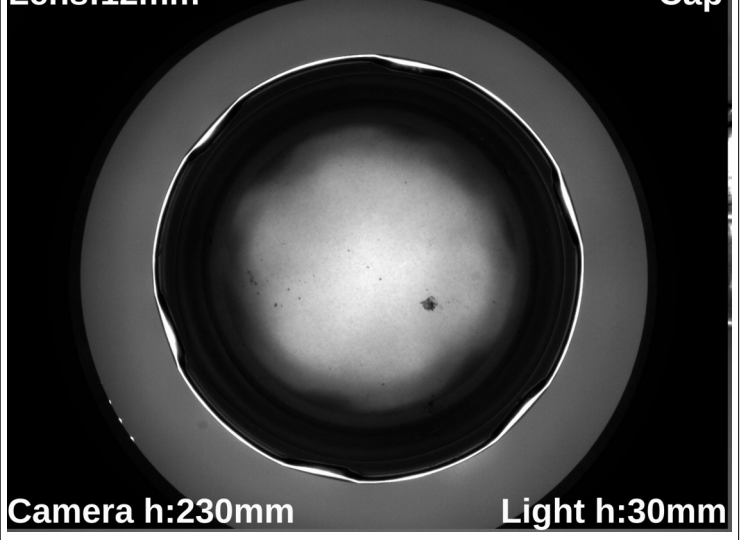


Camera h:230mm

Light h:30mm

Lens:12mm

Toy

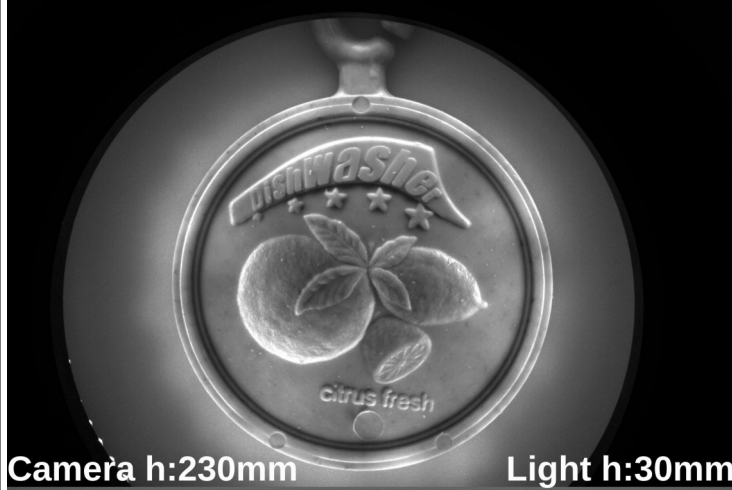


Camera h:230mm

Light h:30mm

Lens:12mm

Terminal

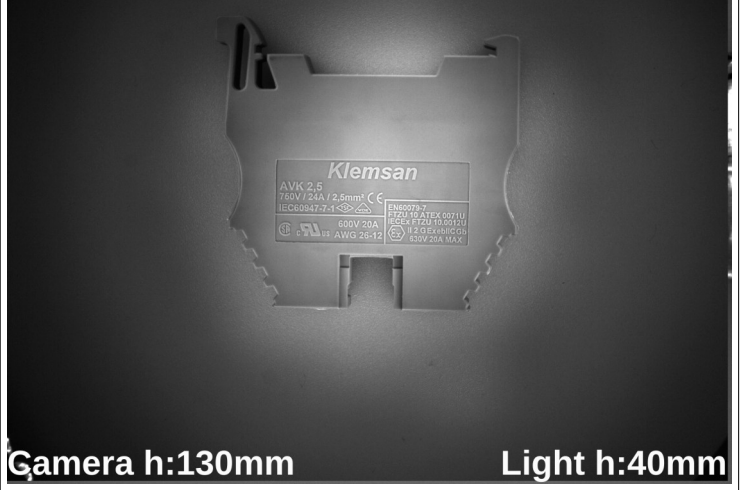

Camera h:130mm

Light h:40mm



Prion Lighting

Half Ring Light

HFL 120-60

Lens:12mm

Package




Camera h:130mm

Light h:40mm

Lens:12mm

Pcb

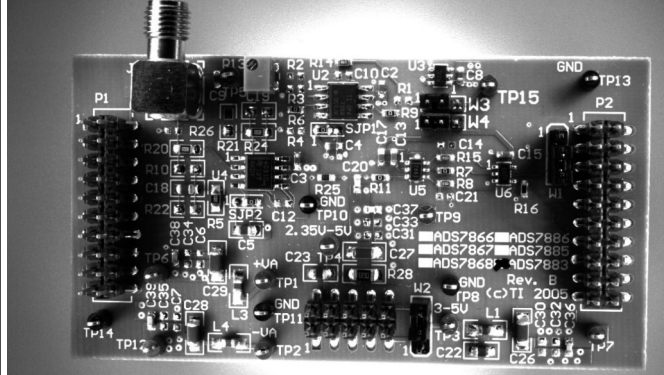


Camera h:170mm

Light h:40mm

Lens:12mm

Box

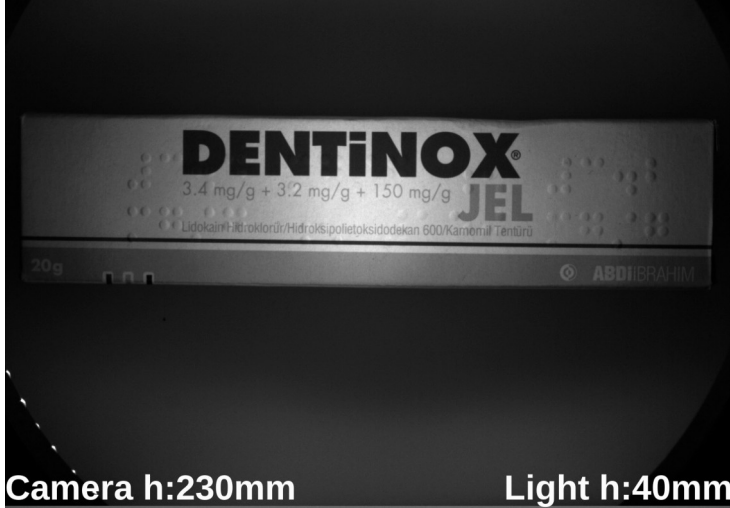

Camera h:230mm

Light h:40mm

Lens:12mm

Package



Camera h:230mm


Light h:40mm



Dumlupınar Mahallesi, Pelin Sok. Nuhoglu 2.
Etap B Blok No:51 D16-19 Kadıköy / İstanbul

E-Mail: info@ludre.com.tr
Contact: +90 216 519 08 54

5.PRODUCT USE

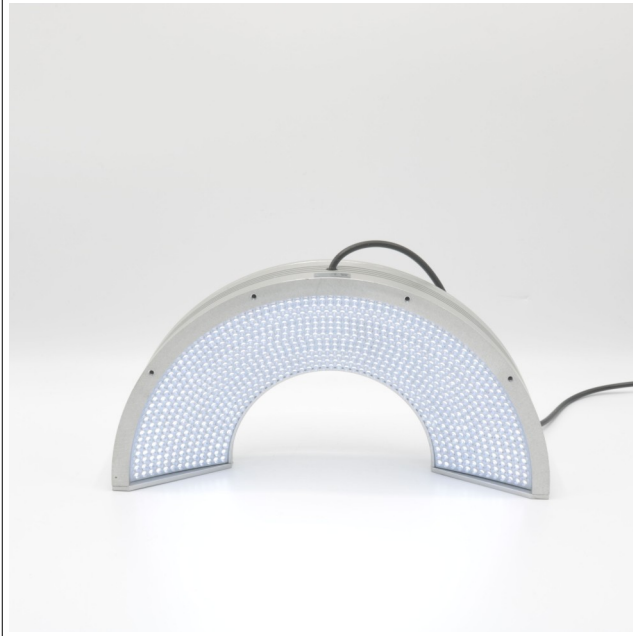

Mounting to the machines is possible with the bolt and nut assembly in the areas indicated in the adjacent image.

The points to be taken into consideration during this installation are as follows: The electronic parts should not be contacted while assembling the product.

In addition, if the product is not installed properly, vibrations that may occur will cause errors during measurement and control.



The product is powered by a 2M long cable fixed on it.

We need to make the 24V DC+ connection from our cable line with a red stripe, and we need to make the GND connection from our single color cable line.

When the supplies are connected in reverse, the product will not be damaged, but the product will not work. Cuts, breaks, etc. on the cable. If there is a problem, please contact us before using the product.

6.DIMENSIONS

